


TYPE	VAL.	DESCRIPTION	QTY.	PART	DESCRIPTION	QTY.	UNIT
C1	22-33	5 MFD	600V				
C2	487	05 MFD	400V				
C3	170	1	400V				
C4	289	50 MFD	600V				
C5	187	25 MFD	600V				
C6	812	05 MFD	600V				
C7	186	00.2	400V				
C8	245	01	400V				
C9	250	05	400V				
C10	508	TRIMMER COND	200V	R10	100 M OHMS	1/4W	
C11	285	10 MFD	600V	R11	300 M	1/4W	
C12	205	200-550 MFD PADDER	600V	R12	2 M OHM VOL CONT 8 SW.	1/4W	
C13	304	0015 MFD	800V	R13	500 OHM	1/4W	
C14	409	3 GANG VARIABLE	600V	R14	2 M OHM	1/4W	
C15	182	0005 MFD	600V	R15	CANDOMM		
C16	147	0005	800V	R16	411 20 OHM	1/4W	
C17	188	002	400V	R17	9900 OHM	1/4W	
C18	162	001	400V				
C19	195	02	800V				
C20	509	10 MFD DRY ELEC COND	50V		30-71 ANTENNA CHOKE		
C21	306	10 MFD	280V		20-15 R.F. PLATE		
C22	329	005 MFD (TUBULAR)	600V		172-14 TUNING METER		
C23	485	005	600V		54549 ANTENNA COIL ASSEM		
C24	175	5 MFD NET ELEC COND	150V		54546 DETECTOR		
C25	294	15	150V		54547 OSCILLATOR		
C26	304	15	150V		54588 HF OSCILLATOR		
C27	405	10 DRY COND	50V		95-308 11.5 TRANS		
R1	45270	75 M OHM	1/4W		95-367 AUDIO		
R2	357	300	1/4W		95-370 POWER	15V 50-60 OHM	
R3	289	500 M	1/4W		95-371	25 OHM ALL VOL	
R4	208	12 M	1/4W		05-22 TONE CONT SWITCH SW		
R5	466	990	1/4W		95-365 POWER CHOKE		
R6	592	5100	1/4W		85-30 PHONO SWITCH		
R7	590	5	1/4W		44-7 JACK		
R8	280	48 M	1/4W		89-24 BAND SELECTOR SWITCH		
R9	303	700	1/4W				

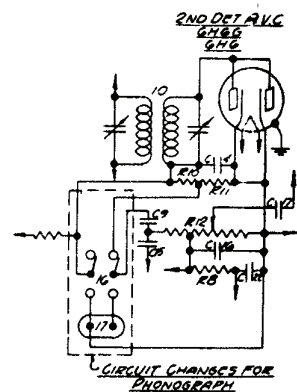

NOTE - #2 SPEAKER FIELD IS AUTOMATICALLY SUBSTITUTED FOR 4925 OHM SECTION OF CANDOMM RESISTOR WHEN SPEAKER PLUG IS INSERTED IN SET

SPEAKER MODEL
 NR1 49-149 12" 12-U-158
 NR1 49-150 12" 12-U-159
 NR2 49-150 6" 12-U-159

I.F. FREQUENCY 456 KC
 12 TUBE SUPERHETERODYNE - 4 BAND
 CHASSIS NO 1203

ZENITH RADIO CORP.

Models 12-U-158, 12-U-159. (Chassis No. 1203)