



Models 6-S-254, 6-S-256 (5644 Chassis)

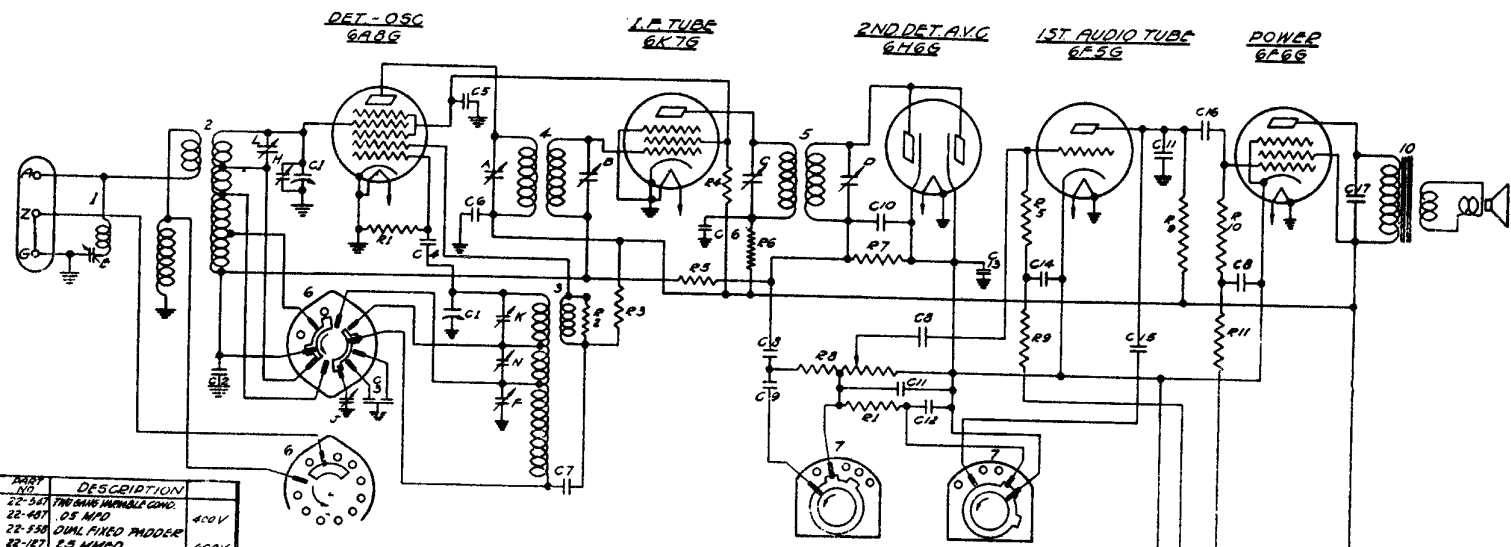

WAS NO.	PART NO.	DESCRIPTION
C1	22-347	100MFD VARIABLE COND.
C2	22-447	.05 MFD
C3	22-550	DUAL FIXED PADDER
C4	22-127	.03 MFD
C5	22-170	1 MFD
C6	22-212	.05 MFD
C7	22-338	.002 MFD
C8	22-327	.02 MFD
C9	22-182	.0005 MFD
C10	22-182	.001 MFD
C11	22-147	.0005 MFD
C12	22-326	.005 MFD
C13	22-182	.01 MFD
C14	22-180	1 MFD
C15	22-448	.004 MFD
C16	22-435	.02 MFD
C17	22-432	.002 MFD
C18	22-551	10MFD ELECTROL COND.
C19	22-552	20MFD ELECTROL COND.
R-1	63-593	47,000 OHM
R-2	63-507	4700 OHM
R-3	63-500	10,000 OHM
R-4	63-677	33,000 OHM
R-5	63-271	1 MEG OHM
R-6	63-648	1000 OHM
R-7	63-658	330 MCH OHM
R-8	63-789	2 MEG OHM VOLUME CONTROL
R-9	63-236	220,000 OHM
R-10	63-537	470,000 OHM
R-11	63-325	150,000 OHM
R-12	63-613	3 SECTION COND OHM
1	20-154	WAVE TRAP ASSEMBLY
2	5-5073	ANT COIL SHIELD ASSEM
3	5-5074	OSCIL COIL SHIELD ASSEM
4	93-416	1ST I.F. TRANSFORMER
5	93-417	2ND I.F. TRANSFORMER
6	85-113	BAND SELECTOR SWITCH
7	85-104	TONE CONTROL SWITCH
8	85-443	POWER TRANSFORMER WITH 50-HO CYCLE
9	85-454	POWER TRANSFORMER WITH 60-HO CYCLE
10		5 PIN TUBE TRANSFORMER

WAS NO.	PART NO.	DESCRIPTION
A		VARIABLE TUNING COIL
B		1ST I.F. TRANS. PRIMARY
C		1ST I.F. TRANS. SECONDARY
D		2ND I.F. TRANS. PRIMARY
E		2ND I.F. TRANS. SECONDARY
F		WAVE TRAP
H		BROADCAST OSCIL (SEE NOTE)
I		ANTENNA BROADCAST (SEE NOTE)
J	22-318	BROADCAST PADDER
K		SHORT WAVE OSCIL (SEE NOTE)
L	22-305	SHORT WAVE DETECTOR
N		VOICE BAND OSCIL (SEE NOTE)

NOTE: TUBES ARE F-K&N MOUNTED ON BATTERY STRIP PART NO. 22-584

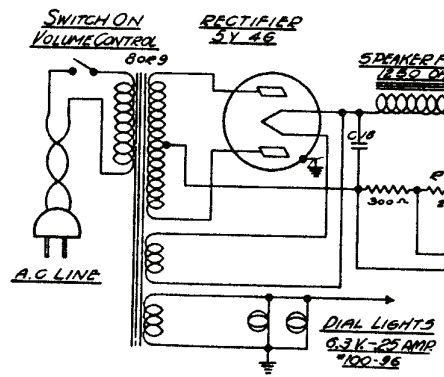

SPEAKERS MODELS
 49-208-10 6-S-254
 49-181-10 6-S-256

I.F. FREQUENCY 456 KG
 6 TUBE SUPERHETERODYNE - 3 BAND
 CHASSIS NO 5644

ZENITH RADIO CORPORATION