




# SCHEMATIC OF THE HEATHKIT® SOLID-STATE SSB RECEIVER MODEL SB-303

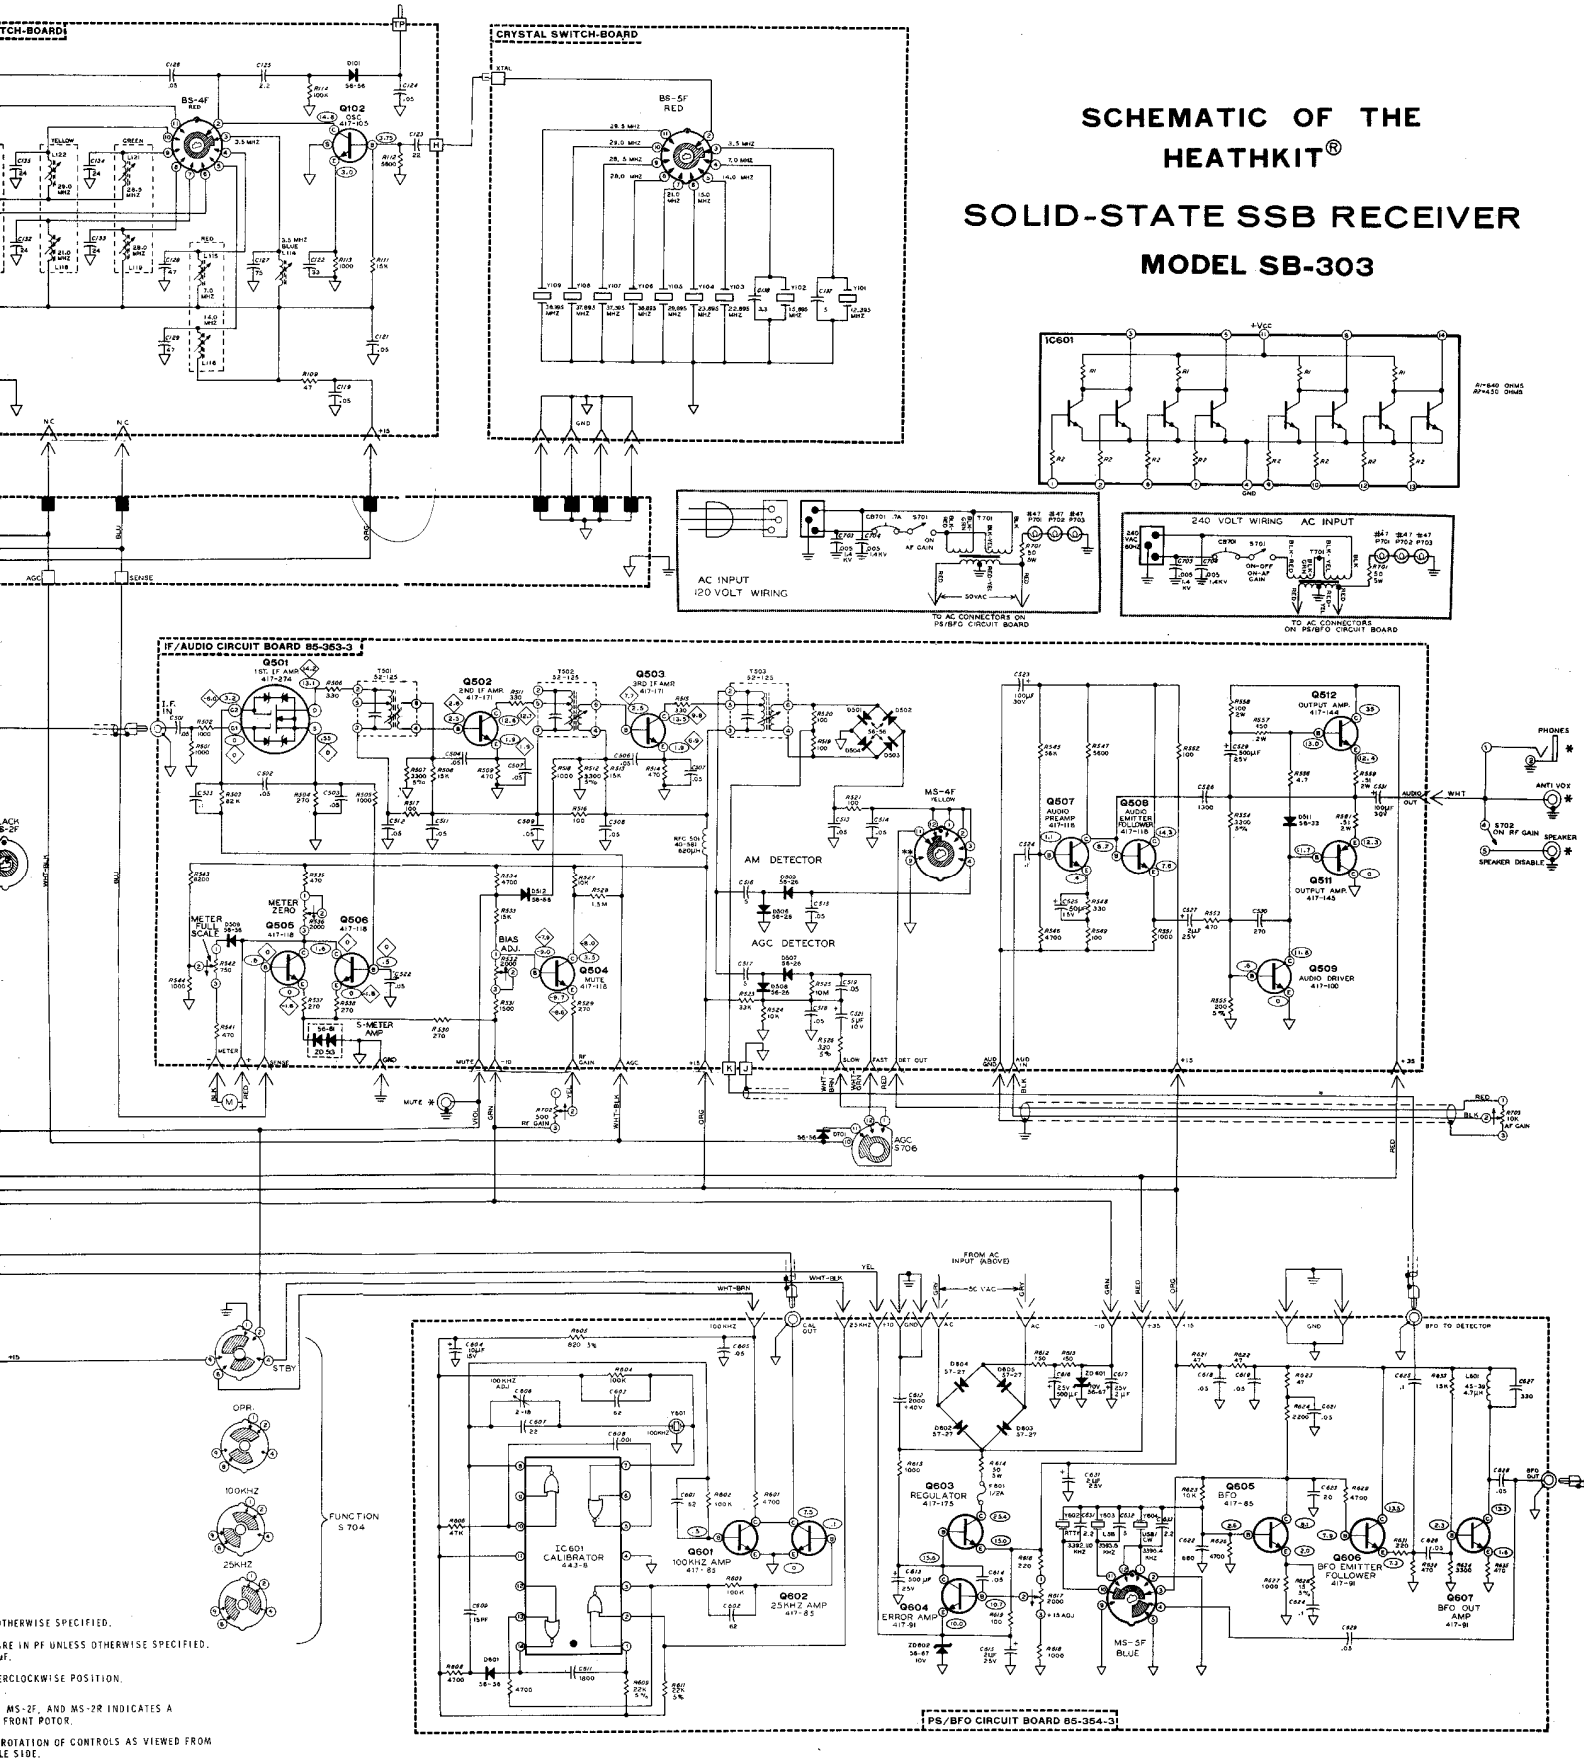

UNLESS OTHERWISE SPECIFIED,  
RESISTOR VALUES ARE IN OHMS UNLESS OTHERWISE SPECIFIED.  
CAPACITOR VALUES ARE IN P.F. UNLESS OTHERWISE SPECIFIED.  
ROTATION OF CONTROLS AS VIEWED FROM FRONT OF CASE.  
MS-2F, AND MS-2R INDICATES A FRONT POT.  
ROTATION OF CONTROLS AS VIEWED FROM REAR SIDE.

IC601 ONMS  
AP432 ONMS

PHONES  
ANTI VOY  
5702 ON RF GAIN  
SPEAKER  
SPEAKER DEABLE

PS/BFO CIRCUIT BOARD 85-354-3