


[361]

PHONOLA - Mod. 5533

- | | | | |
|-----|--------|-----|--------|
| C 1 | 50pF | R 1 | 0.5MΩ |
| C 2 | 25pF | R 2 | 50 Ω |
| C 3 | 120pF | R 3 | 50kΩ |
| C 4 | 120pF | R 4 | 31.5kΩ |
| C 5 | 25pF | R 5 | 31.5kΩ |
| C 7 | 4kpF | R 6 | 1kΩ |
| C 8 | 400pF | R 7 | 1MΩ |
| C 9 | 200pF | R 8 | 1MΩ |
| C10 | 50pF | R 9 | 2MΩ |
| C11 | 200pF | R10 | 50kΩ |
| C12 | 200pF | R11 | 0.25MΩ |
| C13 | 50kpF | R12 | 50 kΩ |
| C14 | 100kpF | R13 | 10 MΩ |
| C15 | 25pF | R14 | 2 MΩ |
| C16 | 200pF | R15 | 40 Ω |
| C17 | 200pF | R16 | 0.1MΩ |
| C18 | 200pF | R17 | 250 Ω |
| C19 | 10kpF | R18 | 6000 Ω |
| C20 | 5kpF | | |
| C21 | 100kpF | | |
| C22 | 100kpF | | |
| C23 | 200pF | | |
| C24 | 25kpF | | |
| C25 | 2kpF | | |
| C26 | 16MF | | |
| C27 | 16MF | | |
| C28 | 5kpF | | |
| C29 | 5kpF | | |
| C30 | 2kpF | | |

Valvola	Tipo
V 1	ECH42
V 2	EF41
V 3	EBC41
V 4	EI41
V 5	A241
EM 4	EM4

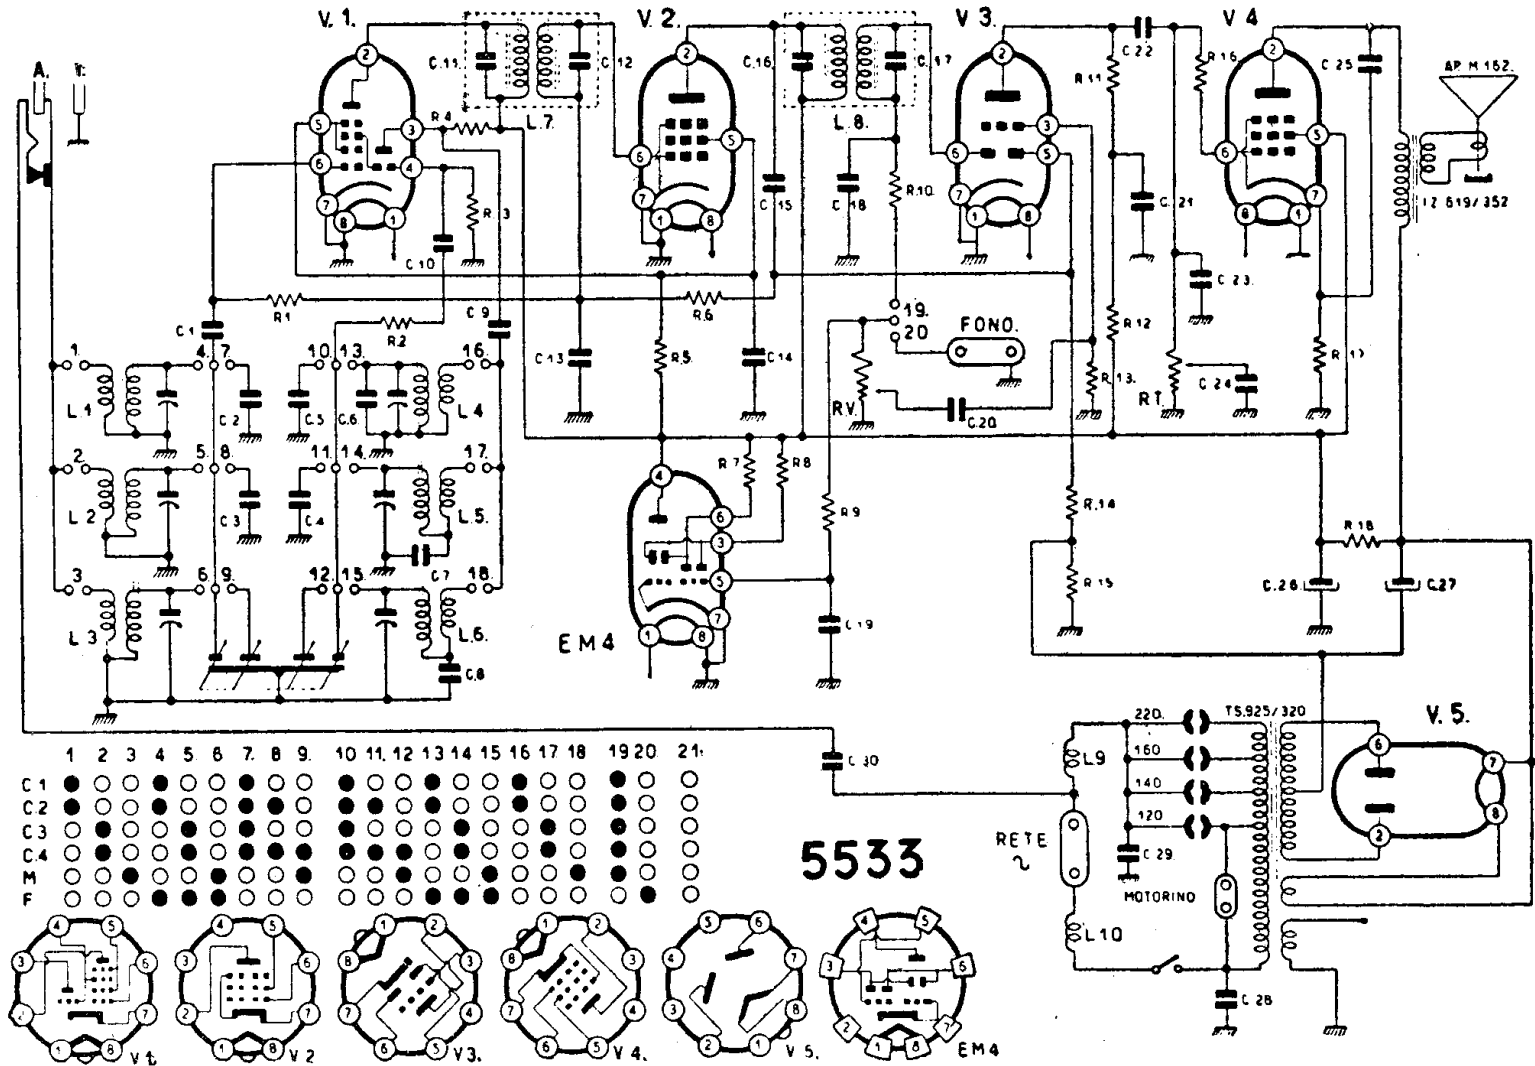

S.A. FIMI - Mod. PHONOLA 5533 - Onde medie e quattro gamme onde corte a bande allargate. Media frequenza 470 kc. Potenza indistorta 3,5 watt. (Per funicella v. figura a parte).

PHONOLA - Mod. 5533