


Registrazione
Riproduzione
Mod. RENAS BM 22 - BC 22

R1	50	KΩ	0.33W	± 5%
R2	60	KΩ	0.33W	± 5%
R3	-	-	-	-
R4	22	KΩ	0.33W	± 5%
R5	82	Ω	0.33W	± 5%
R6	3.0	KΩ	0.33W	± 5%
R7	820	Ω	0.33W	± 5%
R8	1.2	KΩ	0.33W	± 5%
R9	8.0	KΩ	0.33W	± 5%
R10	3.3	KΩ	0.33W	± 5%
R11	4.7	KΩ	0.33W	± 5%
R12	2.2	KΩ	0.5W	± 10%
R13	1.6	KΩ	0.5W	± 5%
R14	2.2	KΩ	0.5W	± 5%
R15	2.7	Ω	0.5W	± 5%
R16	10	KΩ	0.5W	± 10%
R17	3.3	KΩ	0.5W	± 5%
R18	2.7	KΩ	0.5W	± 10%
R19	2.7	KΩ	0.5W	± 5%
R20	1.5	KΩ	0.5W	± 5%
R21	500	Ω	0.5W	± 5%
R22	33	Ω	0.5W	± 5%
R23	4.7	KΩ	0.33W	± 5%
R24	15	KΩ	0.5W	± 5%
R25	2.7	KΩ	0.5W	± 5%
R26	500	Ω	0.5W	± 5%
R27	10	Ω	0.5W	± 5%
R28	10	Ω	0.5W	± 5%
R29	100	Ω	0.5W	± 5%
R30	1	KΩ	0.5W	± 5%
R30	4.7	KΩ	0.5W	± 10%

C1	5	μF	20V
C2	-	-	-
C3	2.2	nF	400Vn ± 10%
C4	100	μF	16V
C5	50	μF	4V
C6	82	nF	250Vn ± 10%
C7	1	nF	400Vn ± 10%
C8	4.7	nF	125Vn ± 10%
C9	-	-	-
C10	50	μF	4V
C11	10	μF	8.4V
C12	200	μF	15V
C13	1	μF	40V
C14	3.3	nF	400Vn ± 10%
C15	200	μF	25V
C16	2	μF	16V
C17	10	nF	125Vn ± 10%
C18	100	μF	4V
C19	10	μF	4V
C20	4.7	nF	125Vn ± 10%
C21	220	pF	500Vn
	180	pF	500Vn
	150	pF	500Vn
	120	pF	500Vn
C22	4.7	nF	125Vn
C23	68	nF	250Vn ± 10%
C24	300	μF	16V
C25	1000	μF	25V

C26	50	μF	16V
C27	300	μF	16V
C28	2000	μF	12V
C100	1	μF	40V
C50	100	nF	125Vn
P100-101	7A/B + 7A4/B	2.2KΩ + 10KΩ	0m 301405
con P101 - interruttore generale 11-ca			
Tr1	SFT 337		
Tr2	SFT 353		
Tr3	AC183		
Tr4	SFT 353		
Tr5	PTO		
Tr7-6	AC181K - AC180K		
D1-2	1N61 oppure SFD 108		
D3-4	M30 C500		
S1	260 8001 0		
F1	0.5A 263.9004.1		
T1	263 8005 0		
L50-L51	264 2001 0		

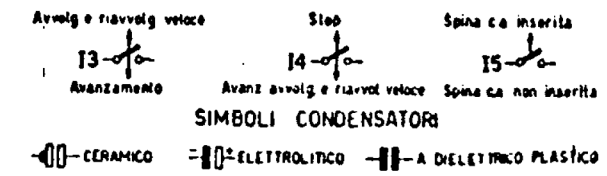

Mod. RENAS BM 22
BC 22