


[359]

PHONOLA - Mod. 5531 A

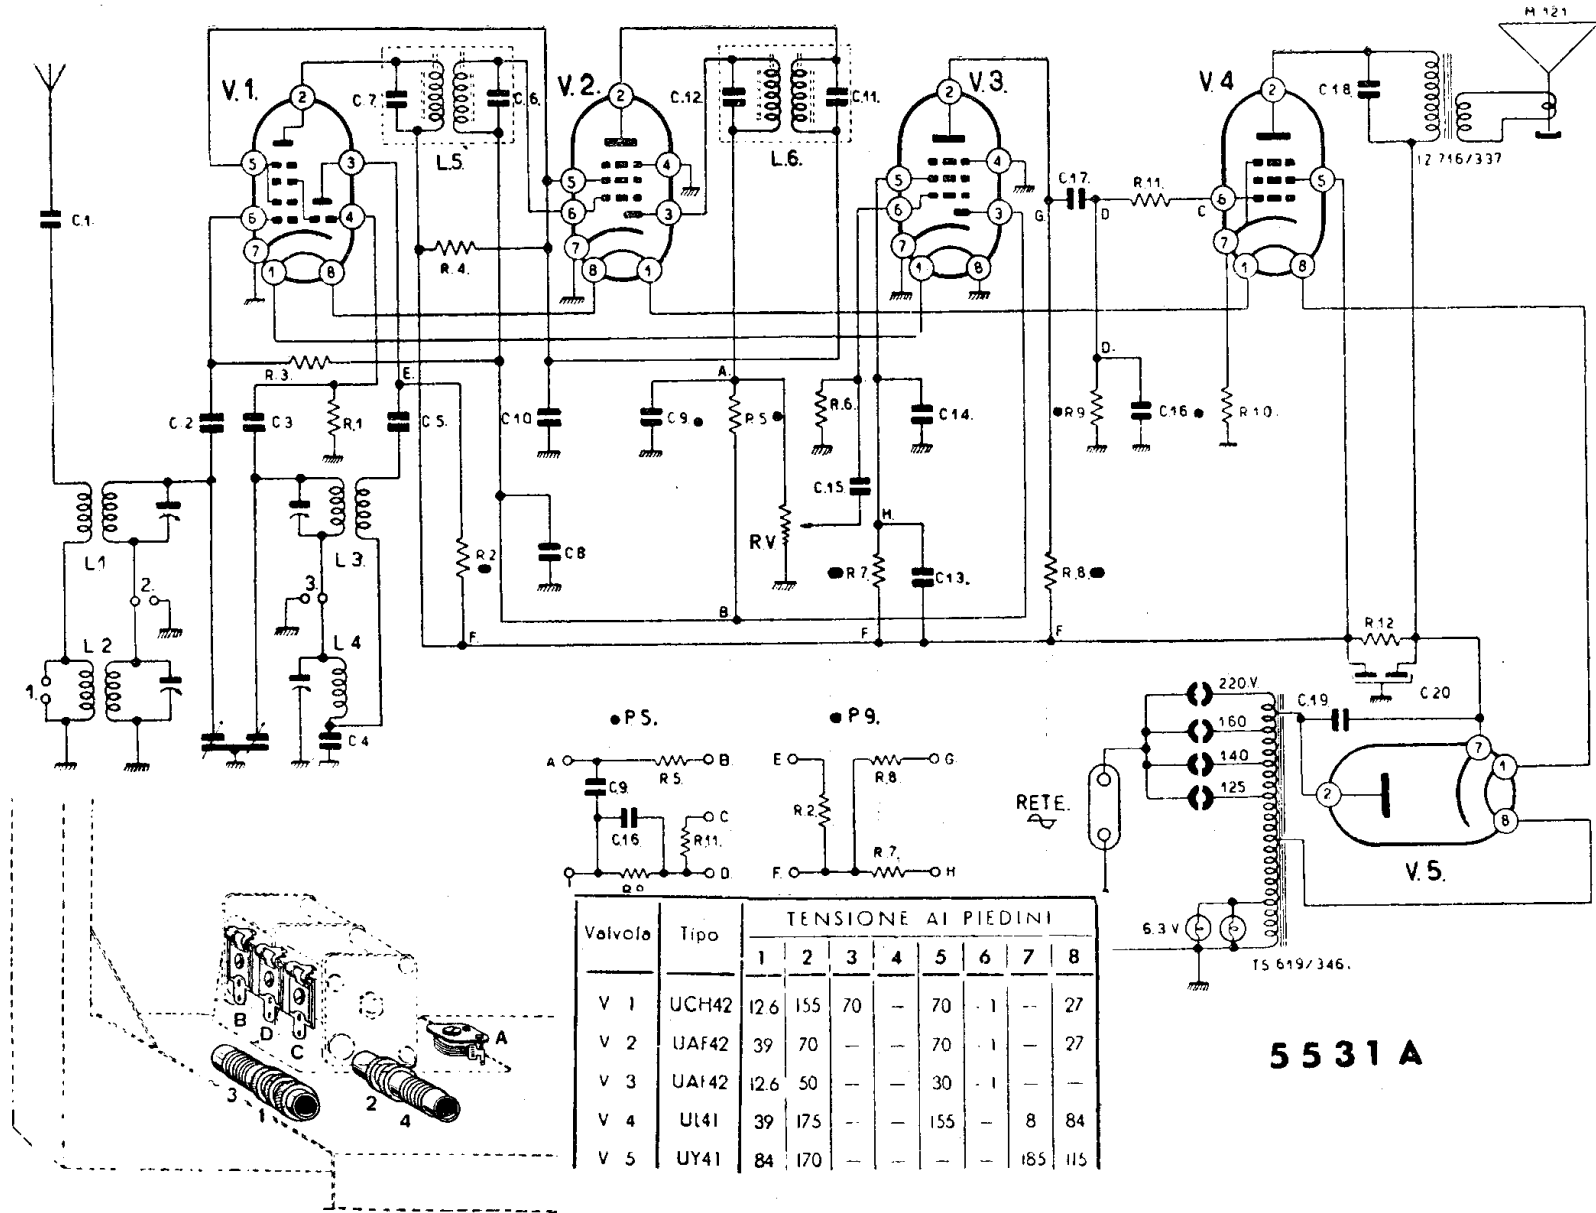

- C 1 1000 pF
- C 2 25 pF
- C 3 10 pF
- C 4 235 pF
- C 5 200 pF
- C 6 200 pF
- C 7 200 pF
- C 8 50kpF
- C 9 200 pF
- C 10 100kpF
- C 11 200 pF
- C 12 200 pF
- C 13 5kpF
- C 14 50kpF
- C 15 2kpF
- C 16 200 pF
- C 17 25 kpF
- C 18 10 kpF
- C 19 25 kpF
- C 20 32-32MF
- R 1 0.1 MΩ
- R 2 10 kΩ
- R 3 1 MΩ
- R 4 15 kΩ
- R 5 2 MΩ
- R 6 10 MΩ
- R 7 1 MΩ
- R 8 0.2 MΩ
- R 9 0.2 MΩ
- R 10 140 Ω
- R 11 0.1 MΩ
- R 12 1600 Ω

Valvola	Tipo	TENSIONE AI PIEDINI							
		1	2	3	4	5	6	7	8
V 1	UCH42	12.6	155	70	-	70	-	-	27
V 2	UAF42	39	70	-	-	70	-	-	27
V 3	UAF42	12.6	50	-	-	30	-	-	-
V 4	UL41	39	175	-	-	155	-	8	84
V 5	UY41	84	170	-	-	-	-	185	115

S.A. FIMI - Mod. PHONOLA 5531 A - Media frequenza 470 kc. Finale: 175 V placca, 155 V schermo e 8 V catodo. Potenza indistorta 2 watt. Consumo 35 watt. (V. istruzioni funicella a parte).

PHONOLA - Mod. 5531 A