


- | | | | |
|------|-------------------------------|-----|---------------------------------------------------------|
| C1 | .001 Mfd Paper 600 V | R1 | 22,000 ohms 1/4 W |
| C2A | Variable (Ant. Section) | R2 | 2.2 Meg 1/4 W |
| C2B | Variable (Osc. Section) | R3 | 47,000 ohms 1/4 W |
| C3 | Trimmer (Ant. 1500 Kc) on C2A | R4 | 1 Meg Volume Control |
| C4 | Trimmer (Osc. 1500 Kc) on C2B | R5 | 22 ohms 1/2 W |
| C5 | 100 Mmf Mica | R6 | 10 Meg 1/4 W |
| C6A | Trimmer (On Input Trans T1) | R7 | .47 Meg 1/4 W |
| C6B | Trimmer (On Input Trans T1) | R8 | .47 Meg 1/4 W |
| C7 | .05 Mfd Paper 400 V | R9 | 150 ohms 1/2 W |
| C8 | .05 Mfd Paper 600 V | R10 | 1200 ohms 1 W |
| C9 | 220 Mmf Mica (Part of T2) | S1 | Switch S.P.S.T. (Part of 82A) |
| C10 | 220 Mmf Mica | S | Speaker P.M. 4" (Voice Coil
D.C. Resistance 2.8 ohm) |
| C11 | .001 Mfd Paper 600 V | T3 | Transformer Output |
| C12 | 220 Mmf Mica | T1 | Transformer I.F. Input |
| C13 | .005 Mfd Paper 600 V | T2 | Transformer I.F. Output |
| C14 | .01 Mfd Paper 600 V | L1 | Loop Antenna |
| C15A | 40 Mfd Filter Paper 150 V | L2 | Oscillator Coil |
| C15B | 40 Mfd Filter Paper 150 V | | |

ADDISON L2

ALIGNMENT PROCEDURE

Steps in Alignment	Test Oscillator			Receiver Dial Setting	Circuit to Adjust	Symbol on Schematic
	Connection to Receiver	Dummy Antenna	Frequency Setting			
1.	Control Grid 12SK7 Pin No. 4	.05 Mfd.	456 Kc.	No Signal 540-700 Kc.	2nd I.F. Transformer	Adjustable Iron Core
2.	Control Grid 12SA7 Pin No. 8	.05 Mfd.	456 Kc.	No Signal 540-700 Kc.	1st I.F. Transformer	C6A C6B
3.	Antenna Clip Back of Chassis	50 Mmfd.	1500 Kc.	1500 Kc.	Oscillator Trimmer	C4
4.	Antenna Clip Back of Chassis	50 Mmfd.	1500 Kc.	1500 Kc.	Antenna Trimmer	C3

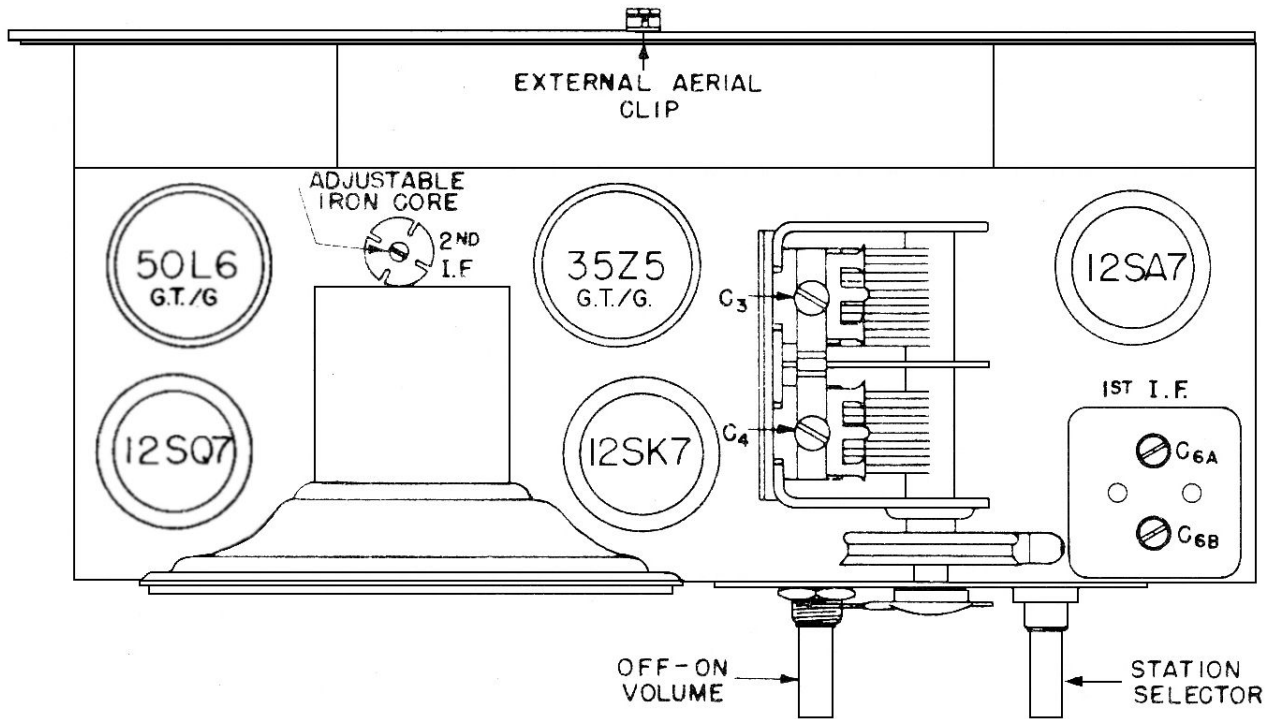

**ADDISON
L2**

