


IMER RADIO - Mod. 539

TABELLA DELLE TENSIONI

Valvola	Placca	Schermo	Pl. oscill.	Griglia	Filam.
6A8 GT	210	70	140	2	6,3
6K7 GT	210	70	—	—	6,3
6Q7 GT	100	—	—	—	6,3
6V6 GT	200	210	—	11	6,3
6X5 GT	280	Catodo 300 V	—	—	6,3

DISPOSIZIONE COMPENSATORI DEL GRUPPO AF

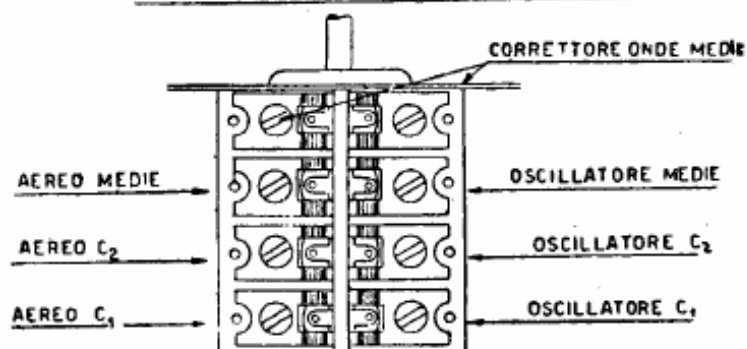

C₁ 13 - 27 m
 C₂ 27 - 35 m
 M 190 - 580

Medie frequenze accordate 467 Kc

Imer « 539 »

IMER RADIO - Mod. 745

Valvola	Placca	Schermo	Catodo
ECH4	250	85	0
6K7 G	250	85	0
6Q7 G	180	—	2
6C5 G	250	—	12
6V6 G	300	310	20
EM4	250	—	—
5X4 G	2 × 325	—	310

Placca oscillatrice: 145 V.