


NOTE
K=1000 OHMS

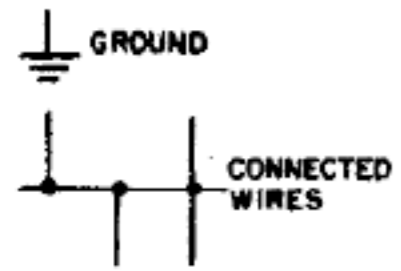

VOLTAGE READINGS TAKEN WITH
20,000 OHMS PER VOLT METER
117 VOLT 60 CYCLE LINE.
TUNING RANGE 520-1680 KC

MODEL 605
MODEL 609
SCHEMATIC
FADA RADIO & ELECTRIC CO. INC.
LONG ISLAND CITY, N.Y. U.S.A.

- Tubes: Osc.-Converter 12SA7GT
I.F. Amplifier 12SK7GT
Det. Avc. A.F. 12SQ7GT
Power Output 50L6GT
Rectifier 35Z5GT

Power supply (25-60 cycles AC) 95-125V AC-DC
Power consumption 30 Watts
Frequency Range 1680-530 KC
I.F. Circuits 456 KC
Speaker 4" P.M. 1 oz. Alnico V Magnet
Speaker Transformer 2500 ohms—400 cycles
Speaker Voice Coil 3.2 ohms

MODELS 605 AND 609 ARE IDENTICAL
WITH THE EXCEPTION OF THE .01- μ F
CONDENSER, NO. 12.6, WHICH IN MODEL
609 IS .02 μ F, NO. 12.8. THOSE
PARTS INDICATED BY AN ASTERISK(*)
APPLY TO MODEL 609; OTHER PART
NUMBERS ARE THE SAME FOR BOTH MODELS