


17	220 pF 1%	34	0.05 μF		
15	20 Ω 12W	33	0.02 μF		
16	1.5 kΩ 0.5W	32	50 μF		
13	88 kΩ 2W	31	32 μF		
12	150 Ω 5W	30	2000 pF 1%		
11	470 kΩ 0.5W	29	50 pF 10%	RL	Altoparlante
10	270 kΩ 0.5W	28	0.01 μF	TU	Trasf. uscita
9		27		TR	Trasf. aliment.
8	1 MΩ	26	0.01 μF	L9	Trasf. R MF
7	10 MΩ 0.5W	25	0.01 μF	L8	Trasf. 1 MF
6	200 kΩ 0.5W	24	100 pF	L7	Bob. padding OC
5	22 MΩ 10W	23	300 pF	L6	Bob. oscill. OM
4		22	300 pF	L5	Bob. padding OC
3	4.7 kΩ 1/2W	21	0.05 μF	L4	Bob. Imm. OC
2	22 kΩ 1/2W	20	150 pF	L3	Bob. oscill. OC
1	1.8 kΩ 0.5W	19	50 pF 10%	L2	Bob. ant. OM
R	Resistenze	18	220 pF 1%	L1	Bob. ant. OC
C	Capacità				

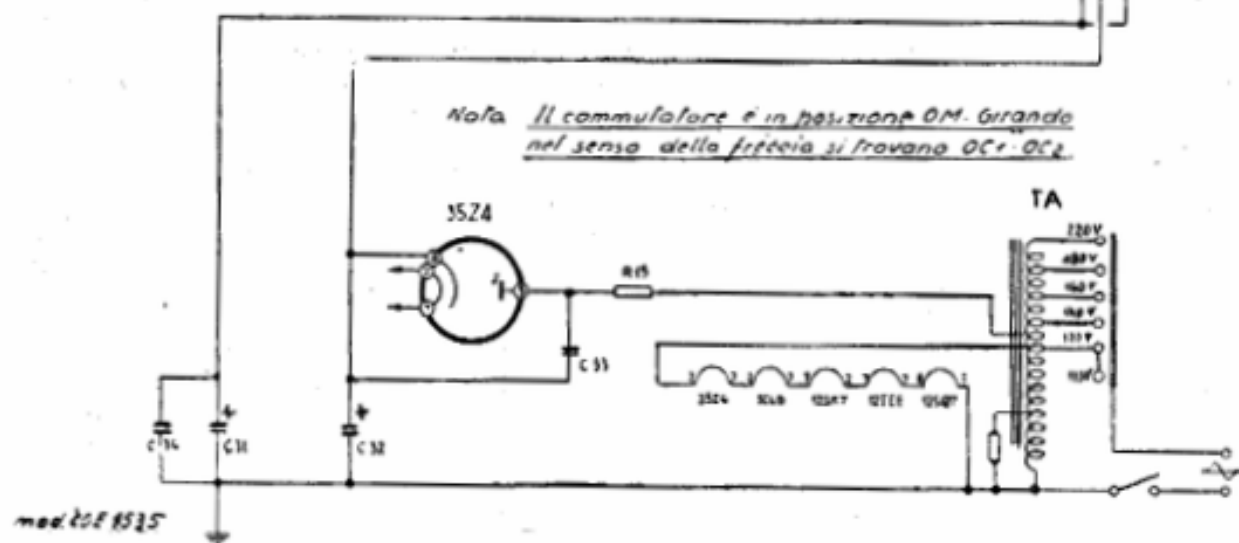

COMPAGNIA GENERALE DI ELETTRICITA' - Mod. CGE 1535. Onde medie e due bande onde corte. Media frequenza a 468 kc/s. Resa d'uscita 1,5 watt.