


« **UAL-UAL** »

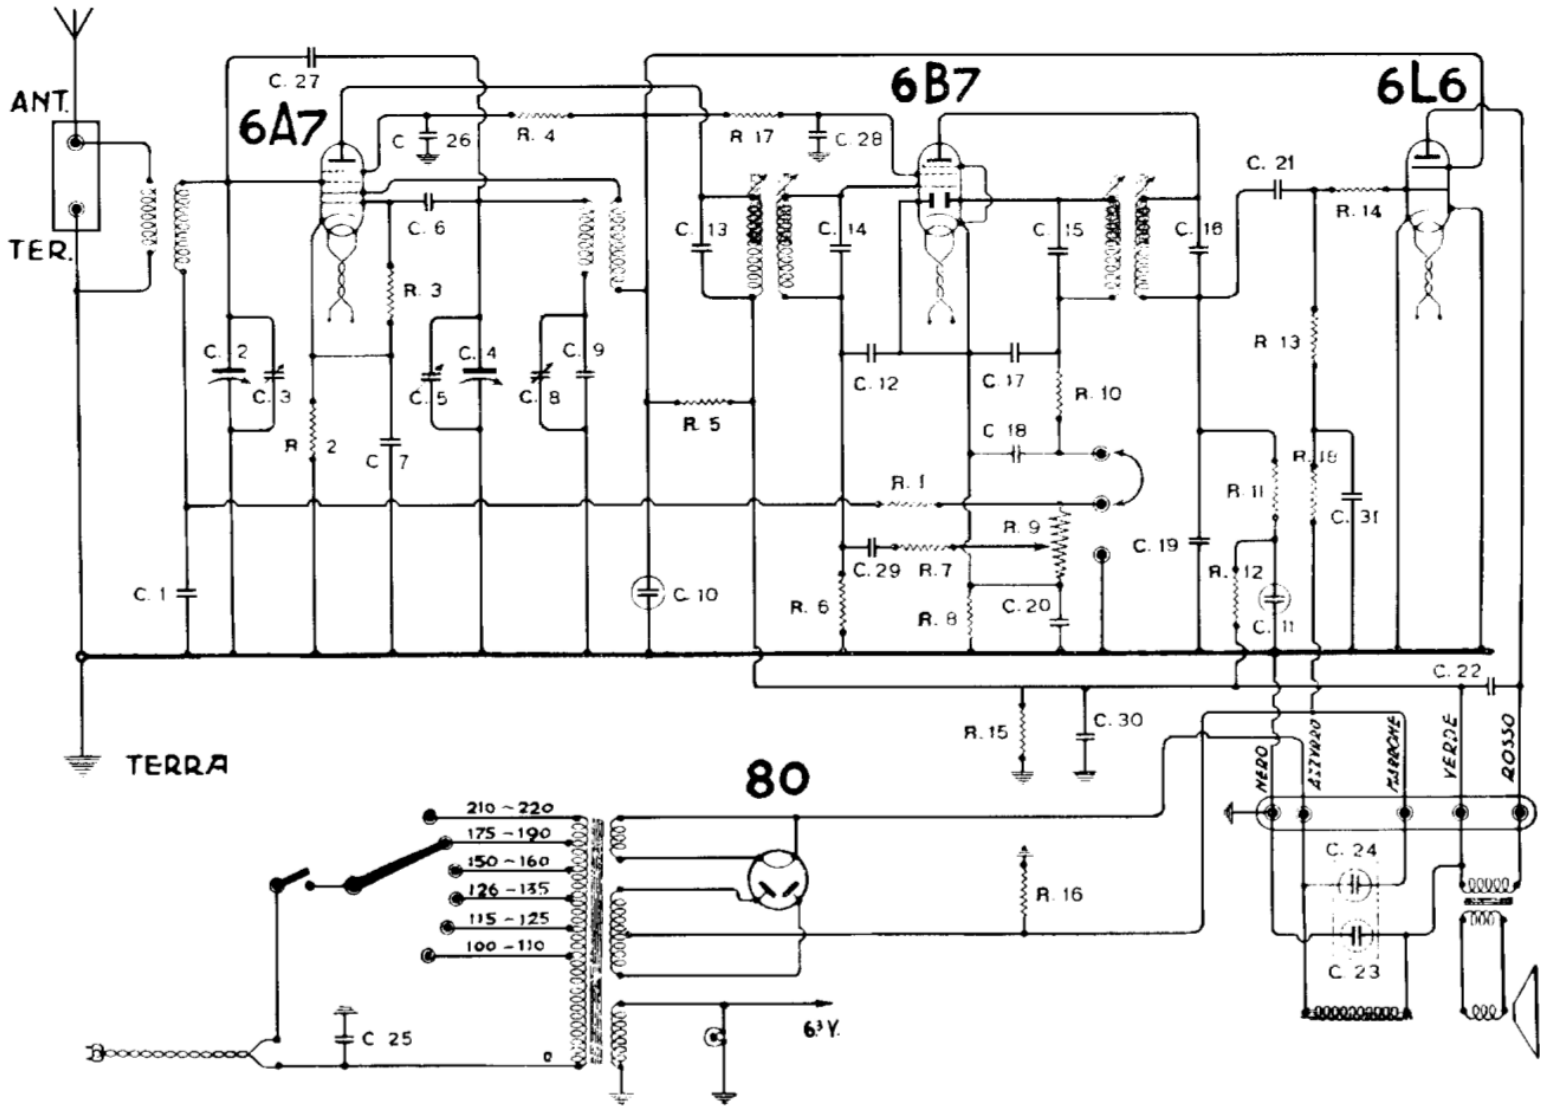

CONDENSATORI.

C 1	50.000 pF	2 Carte	Rd.	65/156
C 2	Variabili		Rd.	65/157
C 3			Rd.	65/157
C 4			Rd.	65/157
C 5			Rd.	65/157
C 6			64 pF	Mica
C 7	50.000 pF	2 Carte	Norm.	7702/28
C 8	5 ÷ 55 pF	PERM.	Norm.	7501
C 9	280 pF ± 3%	Mica	Norm.	7819/18
C 10	4 μF	ELETTR.	Rd.	65/127
C 11	4 μF	ELETTR.	Rd.	65/127
C 12	100 pF	Mica	Norm.	7855/1
C 13	180 pF ± 3%	Mica	Norm.	7865/11
C 14	125 pF ± 3%	Mica	Norm.	7865/5
C 15	180 pF ± 3%	Mica	Norm.	7865/11
C 16	150 pF ± 3%	Mica	Norm.	7865/8
C 17	100 pF	Mica	Norm.	7855/1
C 18	100 pF	Mica	Norm.	7855/1
C 19	500 pF	Mica	Norm.	7807/1
C 20	1 μF	2 Carte	Norm.	7702/41
C 21	10.000 pF	4 Carte	Norm.	7704/21
C 22	5.000 pF	3 Carte	Norm.	7703/18
C 23	8 μF	ELETTR.	Rd.	65/179
C 24	8 μF	ELETTR.	Rd.	65/179
C 25	10.000 pF	4 Carte	Norm.	7704/21

RESISTENZE.

C 26	50.000 pF	3 Carte	Rd.	40/146	
C 27		Mica	Norm.	7750	
C 28		0.25 μF	2 Carte	Norm.	7703/35
C 29		2.500 pF	4 Carte	Norm.	7704/15
C 30		0.25 μF	3 Carte	Norm.	7703/35
C 31		0.25 μF	2 Carte	Norm.	7702/35
R 1	1.6 MΩ	¼ W	Norm.	8061/53	
R 2	640 Ω	½ W ± 6%	Norm.	8071/37	
R 3	50.000 Ω	¼ W	Norm.	8061/38	
R 4	32.000 Ω	½ W	Norm.	8055/36	
R 5	10.000 Ω	1 W	Norm.	8056/31	
R 6	0.8 MΩ	¼ W	Norm.	8061/50	
R 7	0.1 MΩ	¼ W	Norm.	8061/41	
R 8	1.600 Ω	¼ W ± 6%	Norm.	8081/45	
R 9	0.32 MΩ	Reg. Vol.	Rd.	65/157	
R 10	50.000 Ω	¼ W	Norm.	8061/38	
R 11	64.000 Ω	½ W	Norm.	8055/39	
R 12	6.400 Ω	½ W	Norm.	8055/29	
R 13	0.2 MΩ	¼ W	Norm.	8061/44	
R 14	20.000 Ω	¼ W	Norm.	8061/34	
R 15	25.000 Ω	3 W	Norm.	8058/35	
R 16	200 Ω	1 W ± 6%	Norm.	8056/14	
R 17	320.000 Ω	¼ W	Norm.	8061/46	
R 18	0.1 MΩ	¼ W	Norm.	8061/41	