


Schema Elettrico „POPOLARE 36“-Watt Radio.-Torino.

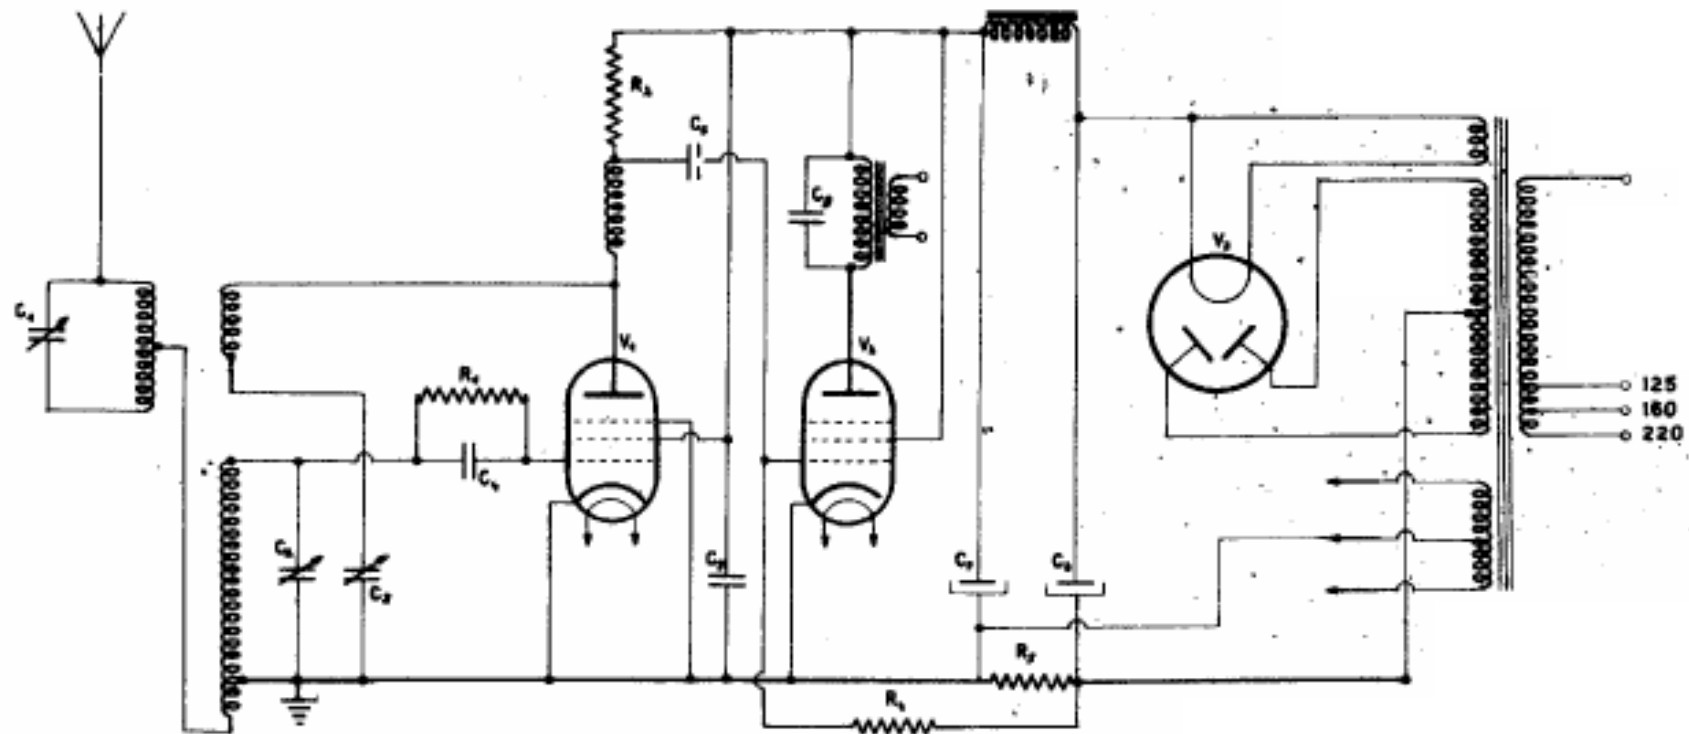

VALVOLE

| N. | TIPO | V.fil. | V.g. | V.a. | V.c. | V.s. |
|----------------|------|--------|---------|------|------|------|
| V ₁ | 67 | 2,5 | 20 | 27 | | |
| V ₂ | 41 | 6,3 | 212 | 220 | 18 | |
| V ₃ | 80 | 5 | 328-328 | | | |

GAPACITÀ

| N. | VALORE |
|-----|----------------|
| 1 | 500 μ F |
| 2 | 500 --- |
| 3 | 389 --- |
| 4 | 100 --- |
| 5 | 0,1 μ F |
| 6 | 10.000 --- |
| 7-8 | 4 --- |
| 9 | 18.000 μ F |

RESISTENZE

| N. | VALORE | DISSIP. |
|----|--------------|-----------------|
| 1 | 1,5 Ω | $\frac{1}{2}$ W |
| 2 | 250.000 --- | --- W |
| 3 | 1M --- | 1 W |
| 4 | 500.000 --- | $\frac{1}{2}$ W |
| 5 | 500 --- | 1 W |