



POSIZIONE CONTATTI
 O TASTO NORMALE
 O " " ABBASSATO



ZOCOCCO NOVAL VISTO DA SOTTO

RIF.	DENOMINAZIONE	VALORE	TOLL.	TENSIONE	RIF.	DENOMINAZIONE	VALORE	TOLL.	WATT.
C1	COND. CERAMICO	10 PF	±5%	500 V	R1	RES. IMPASTO	10 Ω	±5%	0,2 W
C2	"	100 PF	±5%	500 V	R2	"	220 Ω	±5%	0,2 W
C3	"	1000 PF	±5%	500 V	R3	"	1700 Ω	±5%	0,2 W
C4	COMPENSATORE	20 PF	±5%	500 V	R4	"	100 Ω	±5%	0,2 W
C5	COND. CERAMICO	10 PF	±5%	500 V	R5	"	100 Ω	±5%	0,2 W
C6	COND. CERAMICO	10 PF	±5%	500 V	R6	"	100 Ω	±5%	0,2 W
C7	COND. CERAMICO	10 PF	±5%	500 V	R7	"	100 Ω	±5%	0,2 W
C8	COND. CERAMICO	10 PF	±5%	500 V	R8	"	100 Ω	±5%	0,2 W
C9	COND. CERAMICO	10 PF	±5%	500 V	R9	"	100 Ω	±5%	0,2 W
C10	COND. CERAMICO	10 PF	±5%	500 V	R10	"	100 Ω	±5%	0,2 W
C11	COND. CERAMICO	10 PF	±5%	500 V	R11	"	100 Ω	±5%	0,2 W
C12	COND. CERAMICO	10 PF	±5%	500 V	R12	"	100 Ω	±5%	0,2 W
C13	COND. CERAMICO	10 PF	±5%	500 V	R13	"	100 Ω	±5%	0,2 W
C14	COND. CERAMICO	10 PF	±5%	500 V	R14	"	100 Ω	±5%	0,2 W
C15	COND. CERAMICO	10 PF	±5%	500 V	R15	"	100 Ω	±5%	0,2 W
C16	COND. CERAMICO	10 PF	±5%	500 V	R16	"	100 Ω	±5%	0,2 W
C17	COND. CERAMICO	10 PF	±5%	500 V	R17	"	100 Ω	±5%	0,2 W
C18	COND. CERAMICO	10 PF	±5%	500 V	R18	"	100 Ω	±5%	0,2 W
C19	COND. CERAMICO	10 PF	±5%	500 V	R19	"	100 Ω	±5%	0,2 W
C20	COND. CERAMICO	10 PF	±5%	500 V	R20	"	100 Ω	±5%	0,2 W
C21	COND. CERAMICO	10 PF	±5%	500 V	R21	"	100 Ω	±5%	0,2 W
C22	COND. CERAMICO	10 PF	±5%	500 V	R22	"	100 Ω	±5%	0,2 W
C23	COND. CERAMICO	10 PF	±5%	500 V	R23	"	100 Ω	±5%	0,2 W
C24	COND. CERAMICO	10 PF	±5%	500 V	R24	"	100 Ω	±5%	0,2 W

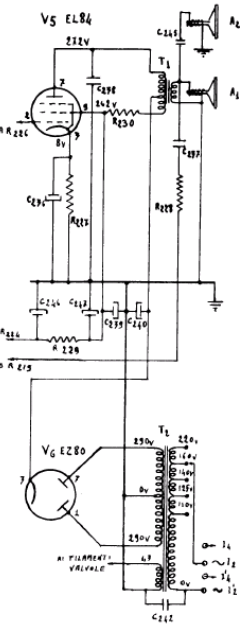

VARIANTE SU CIRCUITO DI ALIMENTAZIONE PER APPARECCHIO MODELLO 704 FC