
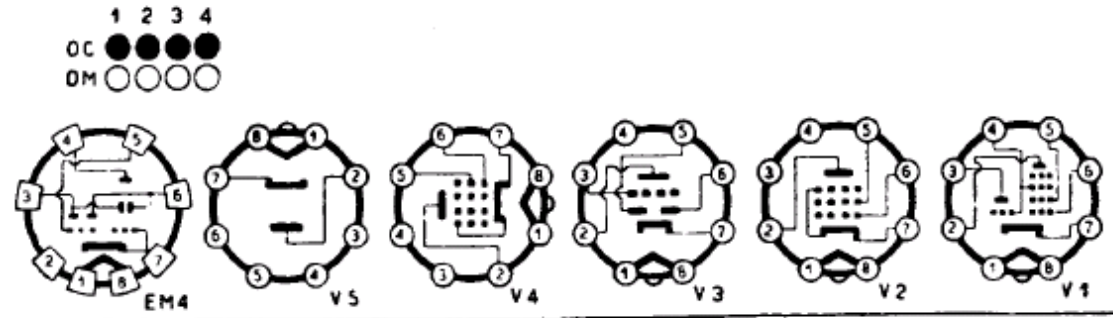


| Nomin | Valore      |
|-------|-------------|
| C 1   | 1.000 pF    |
| C 2   | 100 pF      |
| C 3   | 100 pF      |
| C 4   | 25.000 pF   |
| C 5   | 50 pF       |
| C 6   | 300 pF      |
| C 7   | 200 pF      |
| C 8   | 200 pF      |
| C 9   | 200 pF      |
| C 10  | 100.000 pF  |
| C 11  | 50.000 pF   |
| C 12  | 200 pF      |
| C 13  | 200 pF      |
| C 14  | 200 pF      |
| C 15  | 2.000 pF    |
| C 16  | 25.000 pF   |
| C 17  | 200 pF      |
| C 18  | 10.000 pF   |
| C 19  | 50 + 50 MFD |
| C 20  | 25.000 pF   |
| C 21  | 10.000 pF   |
| R 1   | 150 Ω       |
| R 2   | 47 KΩ       |
| R 3   | 1 MΩ        |
| R 4   | 47 KΩ       |
| R 5   | 10 KΩ       |
| R 6   | 22 MΩ       |
| R 7   | 22 MΩ       |
| R 8   | 0,1 MΩ      |
| R 9   | 0,22 MΩ     |
| R 10  | 0,1 MΩ      |
| R 11  | 150 Ω       |
| R 12  | 800 Ω       |
| R 13  | 22 MΩ       |
| R 14  | 22 MΩ       |
| R 15  | 22 MΩ       |

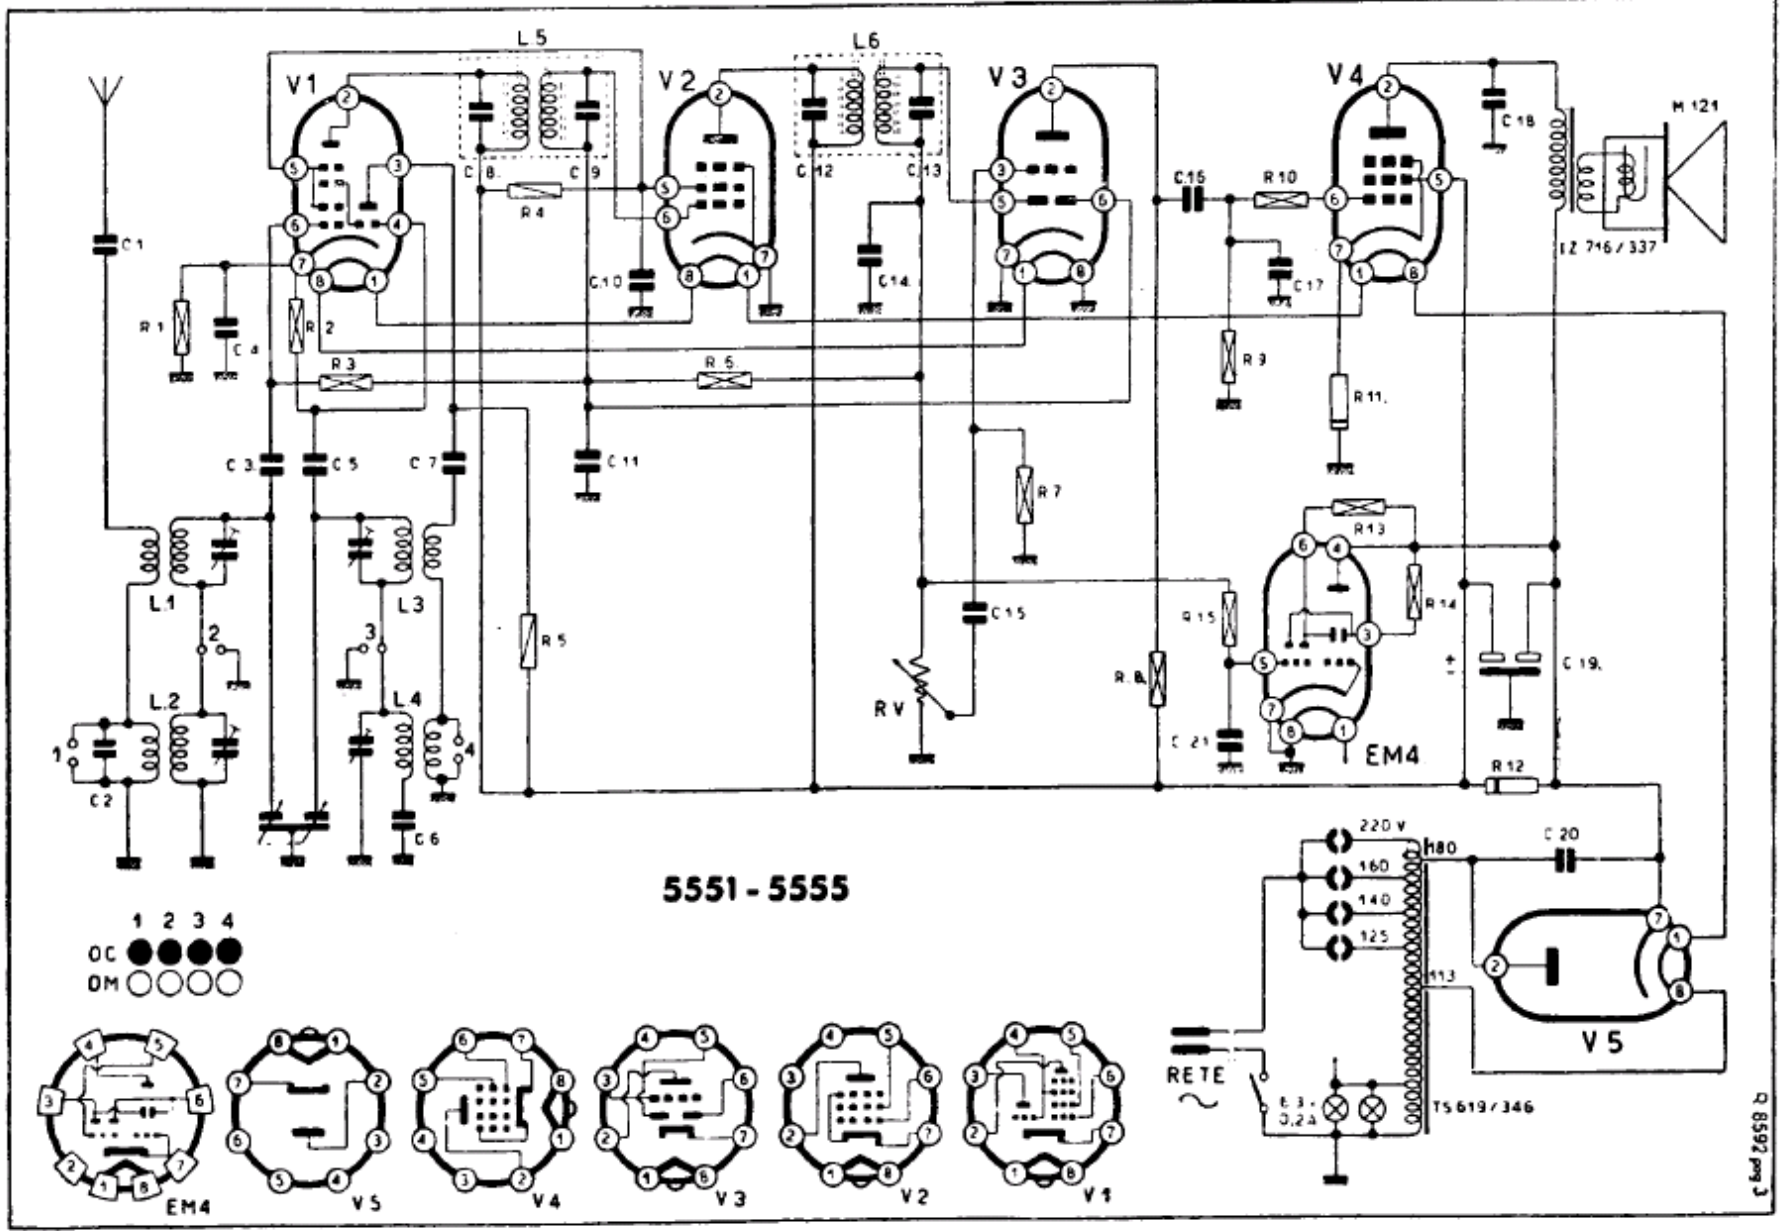

FIMI S. A. - PHONOLA - Modd. 5551 e 5555. Soprammobili due gamme d'onda: Corte da 15,8 a 52 m. Medie da 185 a 576 m. Media frequenza 470 kc/s. Consumo 35 watt. Potenza uscita indistorta 3 watt. Tensione placca finale 175 volt. Per funicella scala V. il I volume pag. 355 - Modd. 5529, 5530, 5533, della FIMI.